


Agrivoltaics System

2P13 Installation Unit | Elevated Agri-PV Table

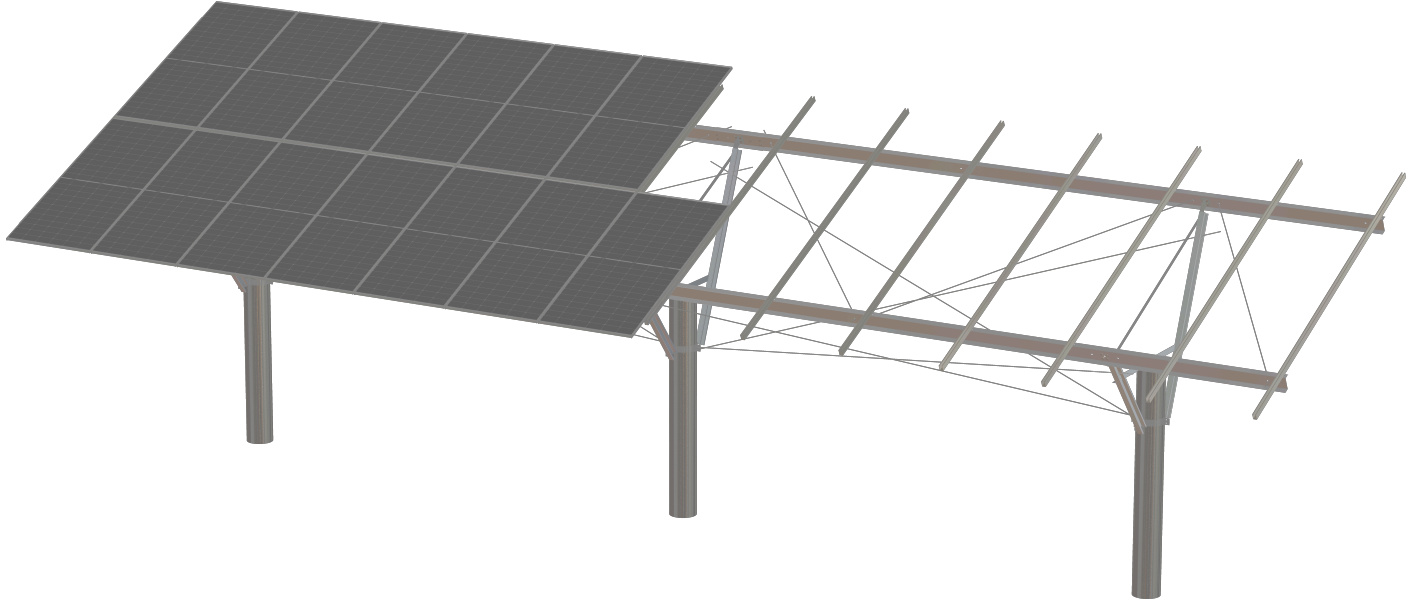

INSTALLATION UNIT

2P13

MODULES / UNIT

26

CAPACITY / UNIT

15.47 kWp

MOQ

3 pallets

KEY SPECIFICATIONS

PV Module	GStar GSD7S72T-595WT
Module Layout	2 portrait x 13 columns
Module Size	2278 x 1134 x 30 mm
Tilt Range	5 - 45 deg
Rails	ZAM steel P5500 channel or equivalent
Structure	ZAM or galvanized steel
Foundation	Screw pile / concrete / site-specific
Reference Snow Load	3600 Pa - verify project basis
Reference Wind Load	2400 Pa - verify project basis
Structure Warranty	25 years

SYSTEM COMPONENTS

- PV modules with MagicFrame interface
- ZAM rails / purlins
- Elevated single-post columns / bracing
- Connection hardware and accessories

IMPORTANT

MOQ ships 108 modules in 3 factory-sealed pallets: 104 installed in four 2P13 tables plus 4 project spare modules. Elevated clearance is project-specific.